


GENERAL PURPOSE RELAY



JQX-10F(JTX)


Contact specification

Contact form	2Z、2H、2D、3Z、3H、3D
Contact resistance	≤100mΩ (1A 6VDC)
Contact material	AgCdO AgSnO ₂
Contact capacity	10A 250VAC/30VDC


Coil specification

Rated coil power	0.9W/1.2VA
------------------	------------


Outline dimension、Mounting holes (Bottom view)

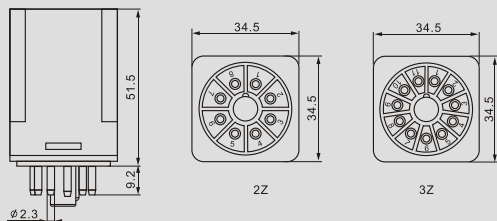


Wiring diagram (Bottom view)




JQX-10F 2Z




JTX-2C



JQX-10F 3Z



JTX-3C




2Z

3Z

Technical specification

Insulation resistance	≥500MΩ (500VDC)
Dielectric strength	Between coil and contact ≥1500VAC 1min
	Between open contacts ≥1000VAC 1min
	Between contacts of different poles ≥1500VAC 1min
Operate / Release time	≤25ms/25ms
Terminal type	Electron tube pin

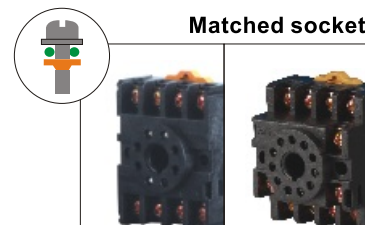

PF083A

PF113A

DC Coil data

Nominal voltage	Operate voltage	Release voltage	Coil resistance
VDC	VDC	VDC	Ω ± 10%
6	4.8	0.6	22.5
12	9.6	1.2	90
24	19.2	2.4	360
48	38.4	4.8	1440
100	80.0	10.0	6250
110	88.0	11.0	7560

AC Coil data

Nominal voltage	Operate voltage	Release voltage	Coil resistance
VAC	VAC	VAC	Ω ± 10%
6	4.8	1.8	4.5
12	9.6	3.6	18
24	19.2	7.2	72
48	38.4	14.4	288
110/120	88.0	36.0	1512
220/240	176	72.0	6050/7200